


Pacific SHORING

Quality Driven, Lead Time Focused

Lite Guard Super-Size Plus Shields

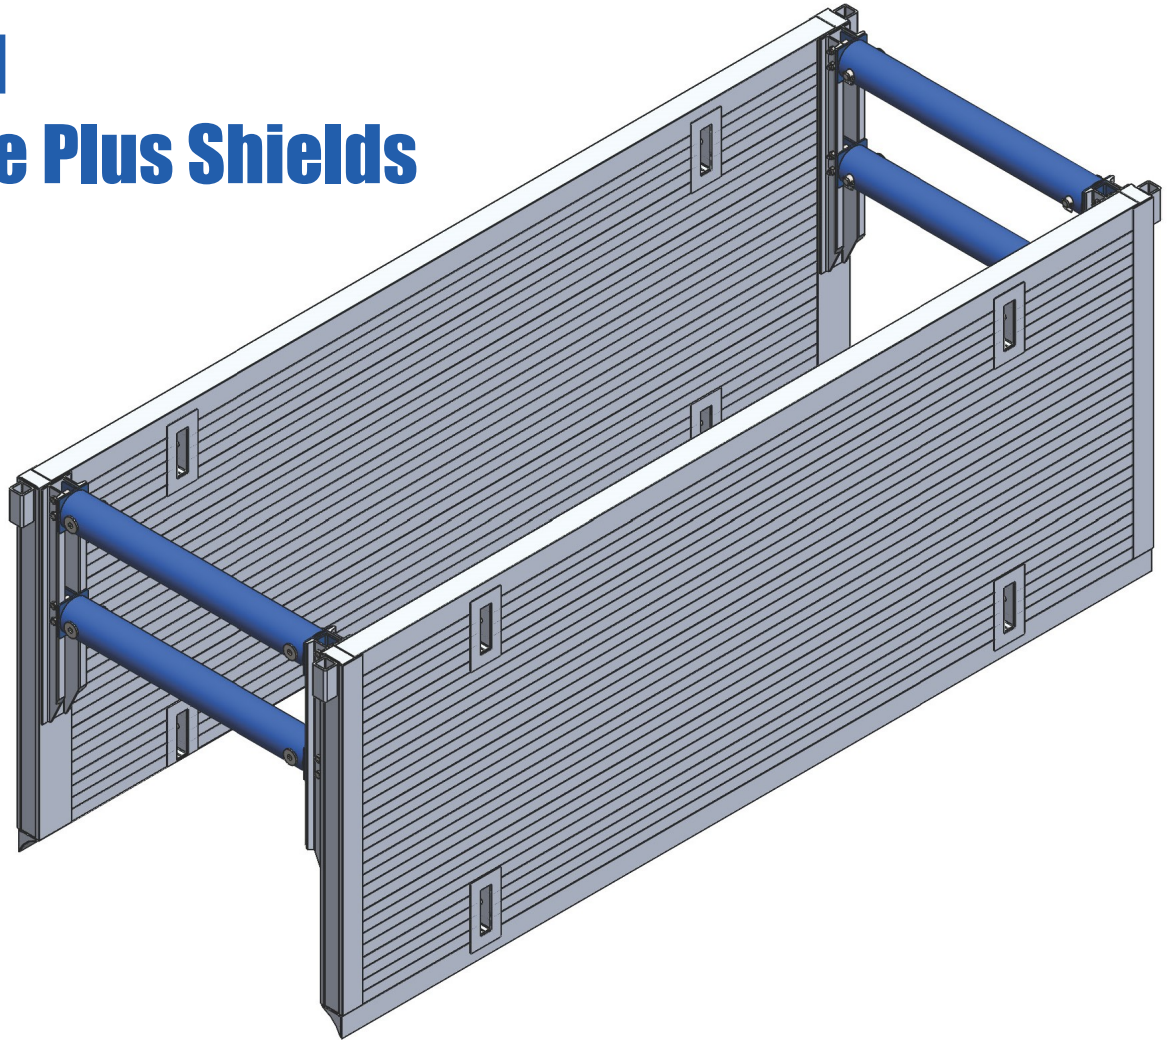

Lite Guard - Super Size Plus Aluminum Shield Properties											
Standard-Duty	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)
				A-25	B-45	C-60	C-80				
	8	12	1,440	30	30	24	18	20	8" SCH. 80	60	3,912
	8	16	1,080	30	24	18	14	20	8" SCH. 80	60	4,866
	8	20	878	30	20	15	11	20	8" SCH. 80	60	5,829
	8	24	725	29	16	12	9	20	8" SCH. 80	60	6,792
Heavy-Duty	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)
	A-25	B-45	C-60	C-80							
	8	12	1,800	30	30	30	23	20	8" SCH. 80	60	4,031
	8	16	1,380	30	30	23	17	20	8" SCH. 80	60	4,986
	8	20	1076	30	24	18	13	20	8" SCH. 80	60	5,949
8	24	840	30	19	14	11	20	8" SCH. 80	60	7,934	