


Pacific SHORING

Quality Driven, Lead Time Focused

Lite Guard Super-Size Plus Shield 8-Inch vs. 5-Inch SCH. 80

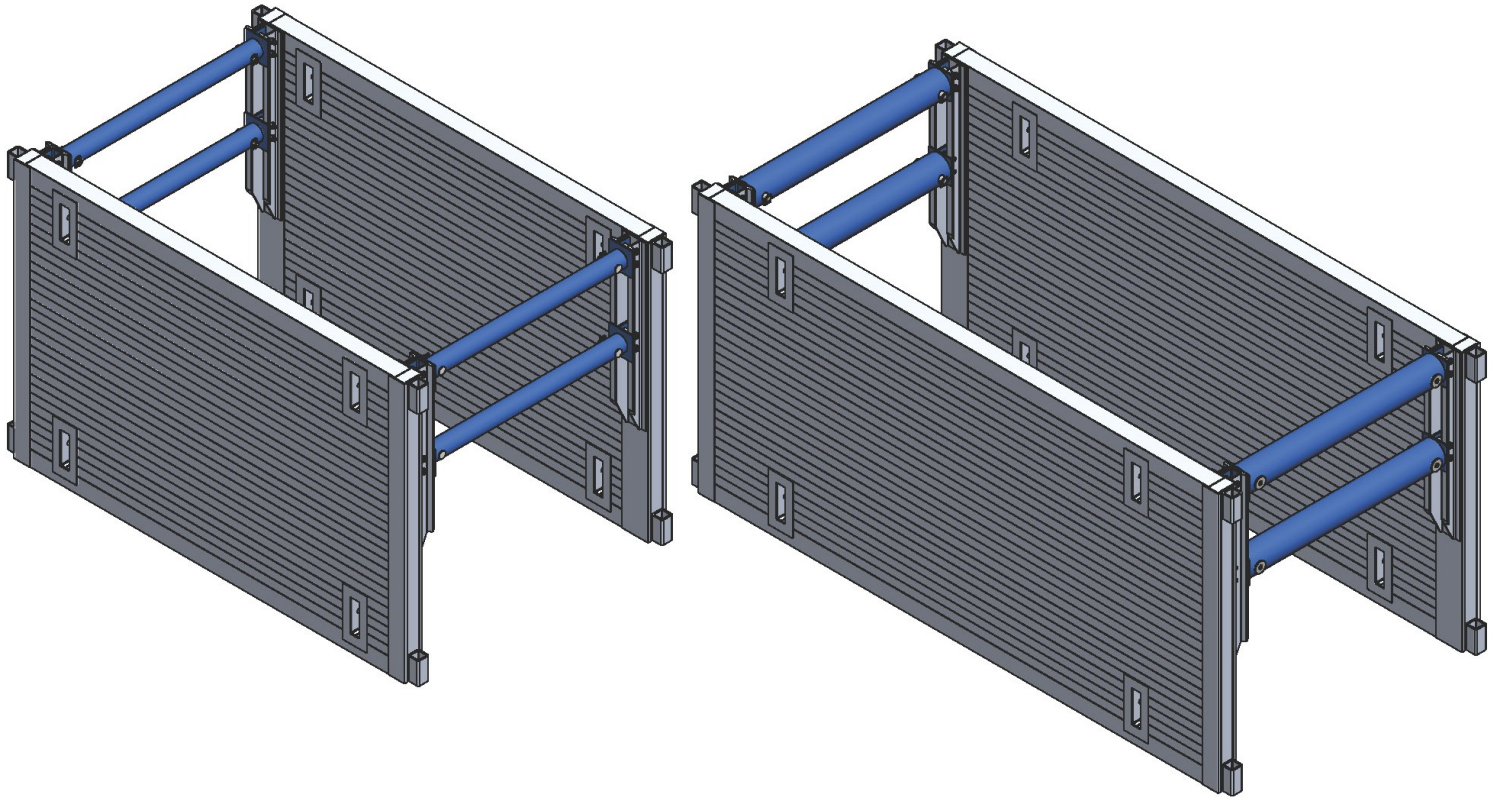

Lite Guard - Super Size Plus Aluminum Shield Properties												
Standard-Duty w/ 5-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
		8	12	1,140	30	24	19	14	12	8" SCH. 80	60	3,796
	8	16	840	30	19	14	10	12	8" SCH. 80	60	4,758	
	8	20	675	27	15	11	8	12	8" SCH. 80	60	5,721	
	8	24	600	23	13	10	8	12	8" SCH. 80	60	6,684	
Standard-Duty w/ 8-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
		8	12	1,440	30	30	24	18	20	8" SCH. 80	60	3,912
		8	16	1,080	30	24	18	14	20	8" SCH. 80	60	4,866
		8	20	878	30	20	15	11	20	8" SCH. 80	60	5,829
	8	24	725	29	16	12	9	20	8" SCH. 80	60	6,792	
Heavy-Duty w/ 8-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
		8	12	1,800	30	30	30	23	20	8" SCH. 80	60	4,031
		8	16	1,380	30	30	23	17	20	8" SCH. 80	60	4,986
		8	20	1,076	30	24	18	13	20	8" SCH. 80	60	5,949
	8	24	840	30	19	14	11	20	8" SCH. 80	60	7,934	