


# Pacific SHORING

Quality Driven, Lead Time Focused

## Lite Guard Super-Size Plus Shield 8-Inch vs. 5-Inch SCH. 80

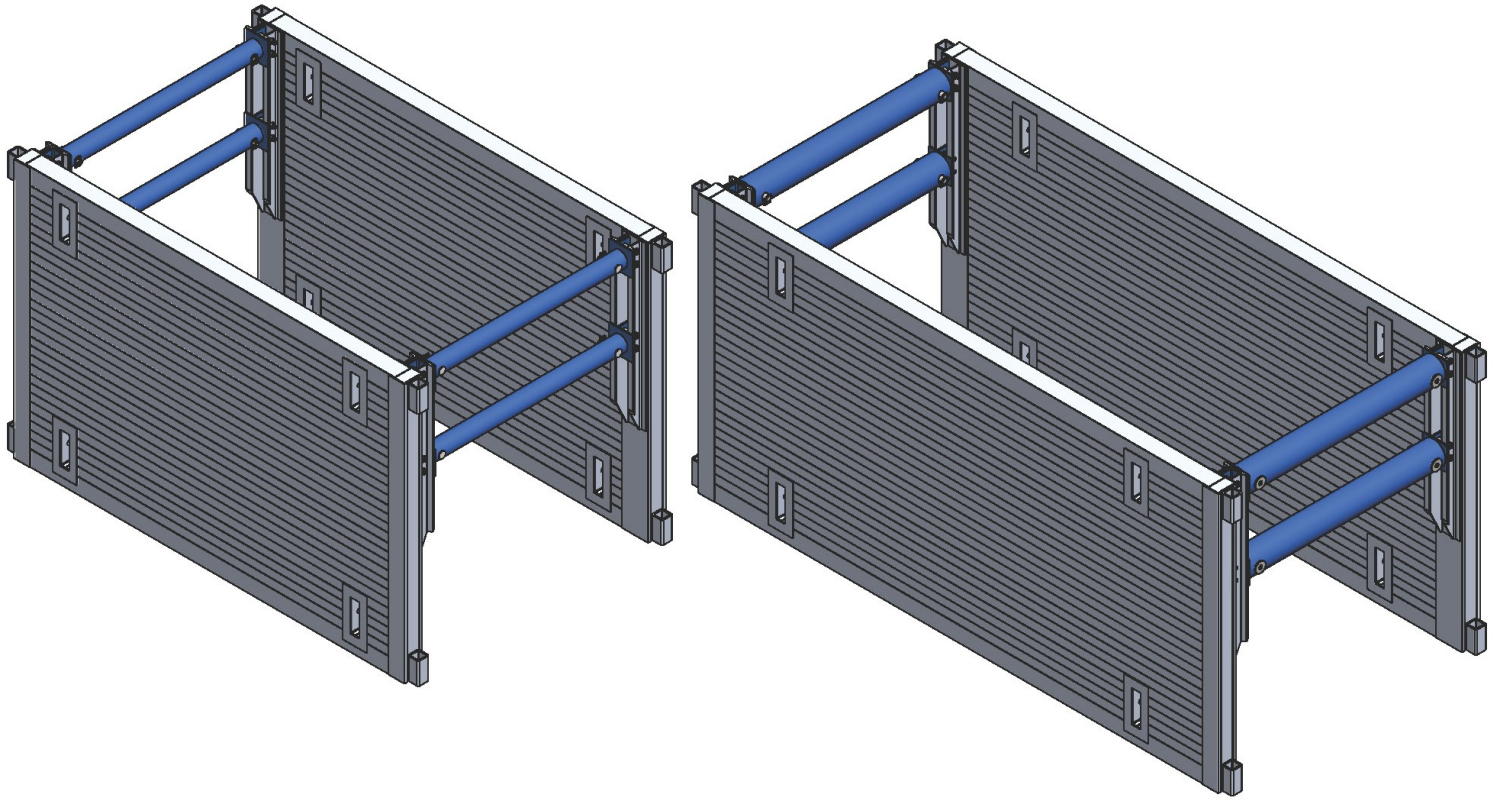

Lite Guard - Super Size Plus Aluminum Shield Properties												
Standard-Duty w/ 5-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
	8	12	1,140	30	24	19	14	12	8" SCH. 80	60	3,796	
	8	16	840	30	19	14	10	12	8" SCH. 80	60	4,758	
	8	20	675	27	15	11	8	12	8" SCH. 80	60	5,721	
	8	24	600	23	13	10	8	12	8" SCH. 80	60	6,684	
Standard-Duty w/ 8-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
		8	12	1,440	30	30	24	18	20	8" SCH. 80	60	3,954
		8	16	1,080	30	24	18	14	20	8" SCH. 80	60	4,909
		8	20	878	30	20	15	11	20	8" SCH. 80	60	5,874
	8	24	725	29	16	12	9	20	8" SCH. 80	60	6,834	
Heavy-Duty w/ 8-Inch SCH. 80	Shield Height (ft.)	Shield Length (ft.)	Load Capacity (PSF.)	Allowable Depth Rating (ft.)				Allowable Trench Width (ft.)	Spreader Size	Vertical Clearance (in.)	Weight (lbs.)	
				A-25	B-45	C-60	C-80					
		8	12	1,800	30	30	30	23	20	8" SCH. 80	60	4,074
		8	16	1,380	30	30	23	17	20	8" SCH. 80	60	5,028
		8	20	1076	30	24	18	13	20	8" SCH. 80	60	6,839
	8	24	840	30	19	14	11	20	8" SCH. 80	60	7,985	